


FORCE Series Security System

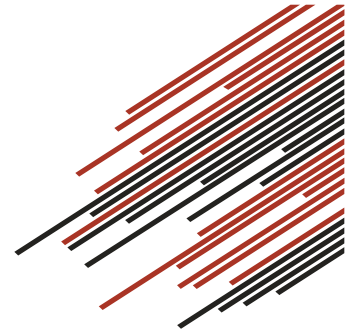

FORCE is an intruder alarm system, intended to give connectivity through a Network (Ethernet), PSTN, cellular modem and long-range radio. The Force has several models that are different in some abilities. The full features model is Force 144. It supports 144 zones and 144 users. At the end of this spec the various models are described.

Features

- 8 onboard zones
- 2 tamper inputs
- Up to 144 zones using zone expanders
- Simple connection, 1 EOL and 2 EOL support
- 16 Partitions

Technical specifications

Outputs

- Two 1A sirens (power taken from backup battery and AC)
- Two 200mA OC outputs
- One 1A relay
- Support one/two relay outputs on each zone expander 8/16
- Support eight relay outputs on each output expander

Local BUS

- Type: Serial communication, Differential
- Baud rate: 19,200kb/s
- Voltage Levels: 0, +13.8V

Aux Voltage Output

- 13.8 VDC
- Current: 1.1A max – transformer version
- 2.0A max – power supply version
- Protection: Thermal Fuse

Keypads Support

- LCD Keypads (up to 16 in a system)
- ID = 0...16
- 4 LEDs

Communication

- Long range radio transmitter
- Network: on-board Ethernet, RJ-45 connector
- Cellular: 2G/3G/4G, SMS, Voice, dual SIM add-on module
- PSTN: on-board, Terminal Block connection, IN-OUT
- Central station (3), contacts (32).
- Cloud connection to PIMAlink 3 Smartphone Application

Power supply

- Housed panel: 230VAC – transformer version
100 to 240VAC – power supply version
- Panel AC Inputs: 14 to 20VAC or 16.5 to 18VDC
- Backup battery (not supplied): 13.8VDC lead-acid battery, up to 7Ah
- Power from battery while AC power is not applied: main board without load and add-on modules: 50mA (max)

General

- Operating temperature range: -10°C to +55°C



Force model features

Features	CFH500 Force 144	CFL500 Force Lite	CFH532 Force 32	CFH632 Force 32C w/app.	CFH516 Force 16
Supported Tamper	2	1	1	1	1
Supported Outputs					
High current siren	2	1	1	1	1
Open Collector	2	2	2	2	2
Relay	1		1	1	
Max # zones	144	64	32	32	16
Max # users	144	64	32	32	32
Supports PSTN	Y	N	Y	Y	Y
Supports Application in Network	Y	Y	N	Y	Y

©2024 Pima Electronic Systems. All rights reserved

Manufactured by:

PIMA Electronic Systems Ltd.

www.pima-alarm.com

5 Hatzoref Street, Holon 5885633, ISRAEL

Tel: +972.3.6506411

Email: support@pima-alarms.com

Doc no. SPC-8350001, Revision: March 2024

